
optoma.nl



## ZH507+ High brightness smart DuraCore laser projector



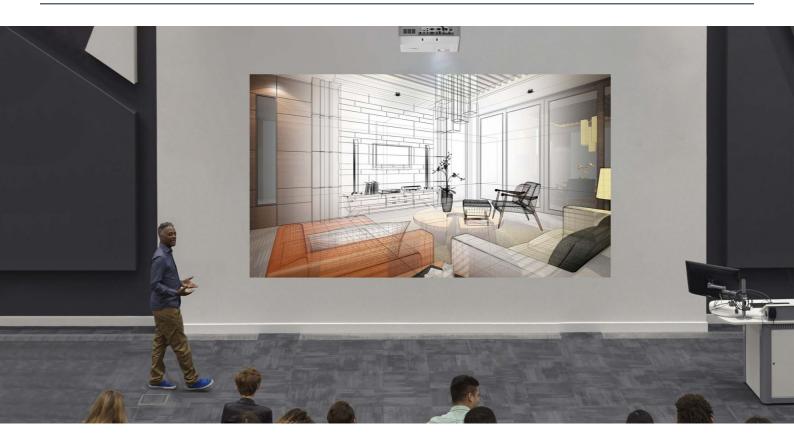

- Bright Full HD 1080p DuraCore laser projector -5500 lumens
- Versatile 1.6x zoom, vertical lens shift and portrait mode
- Built-in smart functions CreativeCast Pro and Optoma Management Suite Cloud compatible
- Ultimate control Crestron, Extron, AMX, PJ-Link and Telnet LAN commands



The ZH507+ projector offers true convenience with low maintenance and longer-life laser technology in a small and lightweight chassis with an impressive 5500 lumens brightness.

With 1.6 zoom, vertical lens shift and built-in 10W speakers, the ZH507+ is part of a range of products that come with the added control flexibility of Crestron. Supporting built-in Smart functions such as CreativeCast Pro allowing for wireless presentations and the shift in bring your own devices (BYOD), along with support of Optoma Management Suite Cloud allowing you to control and manage the ZH507+ from any location.

## **Specifications**

EAN: 5055387666009, Colour: V	
JPC: 796435 44 625 3, Colour:	White
Display/image	
Display technology	DLP™
Resolution	1080p Full HD (1920x1080)
Brightness	5.500 lumens
Contrast ratio	300.000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Keystone correction -	+/-30°
horizontal	
Keystone correction - vertical	+/-30°
Has vertical auto keystone correction	Yes
	1070 /
Displayable colours (millions) Horizontal scan rate	1073.4 15.375 ~ 91.146 Khz
Vertical scan rate	50 ~ 85 Hz (120Hz for 3D)Hz
Uniformity	80%
Screen size	0.51m ~ 8.14m (20.2" ~ 320.4") diagonal
Lamp info	0.5 mi ~ 6. 14m (20.2 ~ 520.4 ) diagonal
Lamp into Light source type	Laser
LASER life	30.000 hours
	30.000 Hours
Optical Throw ratio	1.4:1 ~ 2.24:1
Throw ratio Projection distance (m)	1.4:1 ~ 2.24:1 1m - 10m
Zoom Zoom type	1.6 Manual
Zoom type Ecoal longth (mm)	Manual
Focal length (mm) Lens shift	20.91mm~32.62mm/0.823"~1.284"
Lens shift Native offset	Vertical +16%
	100% Yas ((downloads link))
Lens shift Connectivity	Yes - {{downloads_link}}
Connections	Inputs 1 x HDMI 2.0, 1 x HDMI 1.4a 3D support, 1 x VGA (YPbPr/RGB), 2 x Audio 3.5mm, 1 x Mic 3.5mm, 1 x Composite video Outputs 1 x VGA, 1 x Audio 3.5mm, 1 x USB-A power 1.5A, 1 x USB-A 2.0, 1 x USB-A 3.0 Control 1 x RS232, 1 x RJ45, 1 x 12V trigger, 1 x micro USB service, 1 x 3D sync
General Noise level (typical)	30dB
Noise level (max)	32dB
PC compatibility 2D compatibility	UHD, FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac NTSC M/J, 3.58MHz, 4.43MHz PAL B/D/G/H//M/N, 4,43MHz SECAM B/D/G/K/K1/L, 4.25/4.4MHz 480/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz), 1080o(50/60Hz)
3D compatibility	Side-by-Side:1880/50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60
3D	Full 3D
Security	Security bar, Kensington Lock, Password protected interface
P rating	IP6X
OSD / display languages	25 languages: Arabic, Czech, Danish, Dutch, English, Farsi, Finnish, French, German, Greek, Hungarian, Indonesian, Italian, Japanese, Norwegian, Polish, Portuguese, Romanian, Russian, Chinese (simplified), Spanish, Swedish, Chinese (traditional), Turkish, Vietnamese
24/7 operation	Yes
360° operation	Yes
Operating conditions	5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max
	humidity 85%
Remote control	Data remote with mouse function
Heat dissipation	918BTU/hour
Speaker count	2
Watts per speaker	10W
n the box	AC power cord Remote control 2x AAA batteries LISB Wireless Adaptor
	USB Wireless Adaptor Basic user manual
nput lag	16.20ms
Optional wireless models	UHDCast Pro, QuickCast Bundle, QuickCast starter kit
	STIDOUSTITO, QUIONOASEDUTIUID, QUIONOASESEATENTE
Networking LAN - control	Yes
	100
Power	1001/ 2401/ 50 6047
Power supply Power consumption (standby)	100V ~ 240V, 50-60Hz ~0.5W
Power consumption (standby)	<0.5W 227W
Power consumption (min)	
Power consumption (max)	282W
Weight and dimensions Dimensions (W x D x H) mm	007 005 100 5
	337 x 265 x 122.5







Grossrively for identification purposes only and may be trademarks of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are to identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. 28092023121606